


REV	ECO	DATE
A	-	2022/2/23

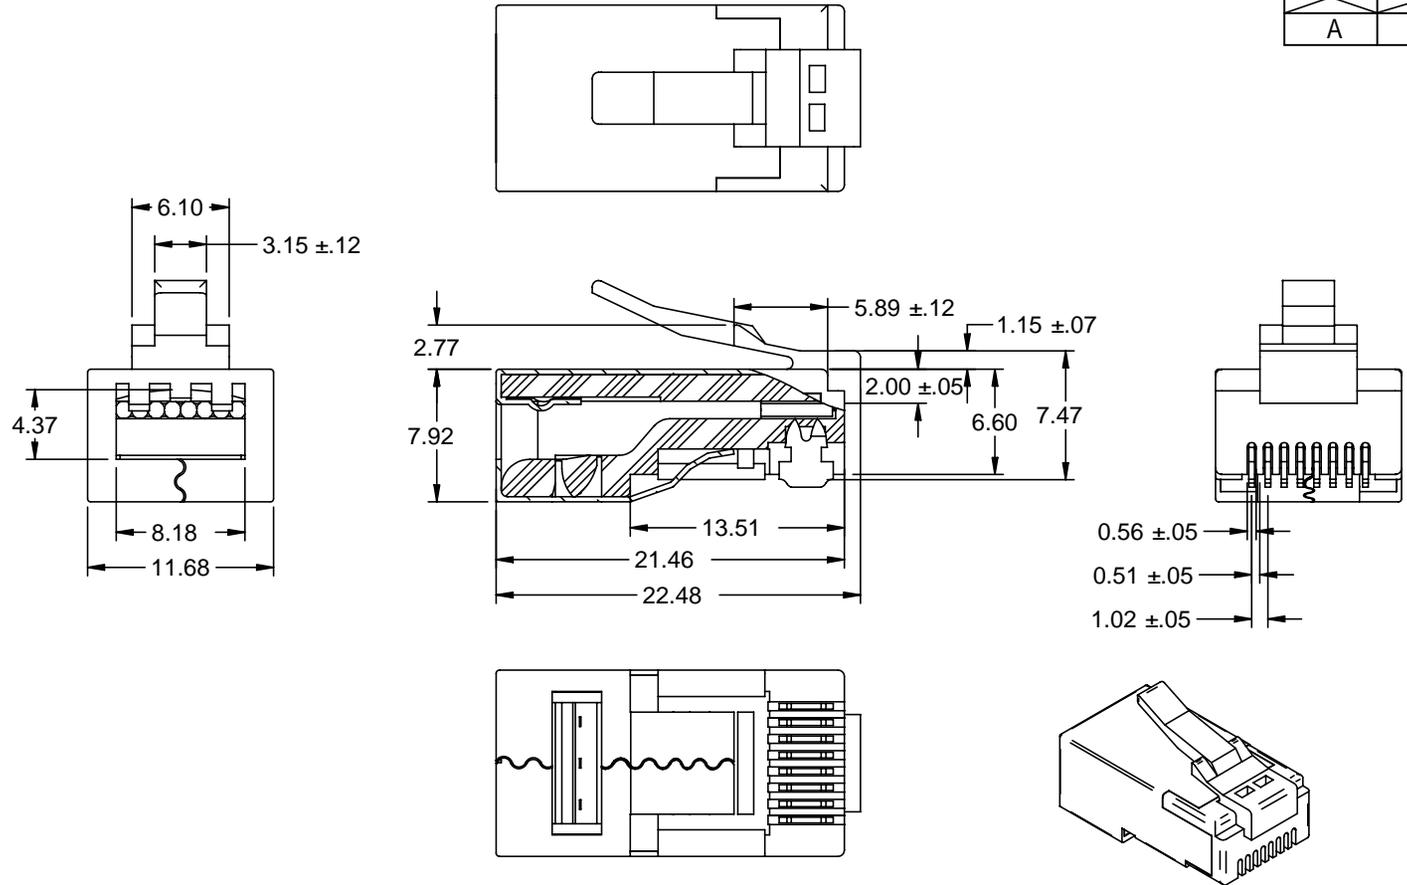

NOTES:

1. ELECTRICAL SPECIFICATIONS

INSULATION RESISTANCE: 1000 MEGOHMS
 WITHSTAND VOLTAGE: 1000V,AC/ MINUTE

2. MECHANICAL SPECIFICATIONS

CONTACT MATERIAL: PHOSPHOR BRONZE 0.3MM THICKNESS
 CONTACT PLATING: 50 MICRO-INCH GOLD PLATE OVER 100
 MICRO-INCH NICKEL PLATING


HOUSING MATERIAL: POLYCARBONATE
 DURABILITY: 1000 CYCLES MIN
 UL FLAMABILITY RATING: 94-V0

3. ENVIRONMENTAL SPECIFICATIONS

TEMPERATURE RANGE: -40 TO +70

4. FOR FLAT OVAL OR ROUND CABLE

5. FOR SOLID OR STRANDED WIRE APPLICATIONS

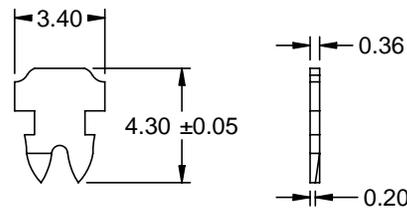

CONTACT

<p>This PROPRIETARY Document is property of Cinch Connectivity Solutions. It is confidential in nature, non-transferable, and issued with the clear understanding that it is not to be traced or copied without permission and is returnable upon demand.</p> <p>INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2009.</p>	Model No.	32-2098UL	AIM-Cambridge	
	RoHS <input checked="" type="checkbox"/> (EU)/2015/863 COMPLIANT	Cage Code	N/A	
	UNLESS OTHERWISE SPECIFIED UNITS: MM X ±.5 .X ±.15 .XX ±.10 ANGLES ±2°	3RD ANGLE PROJECTION	Title: RJ45 MOD PLUG SHIELDED,SOLID,U	
	Drawn by: TOMMY REN	Date: 2022/2/23	Drawing No. 32-2098UL	Rev. A
	Size	A	DO NOT SCALE DRAWING	Workmanship Std: N/A
				Sheet 1 of 1