


B

A

B

A

DATE	REV	ECN	APP'D. BY
08/19/25	A0	12584	KW

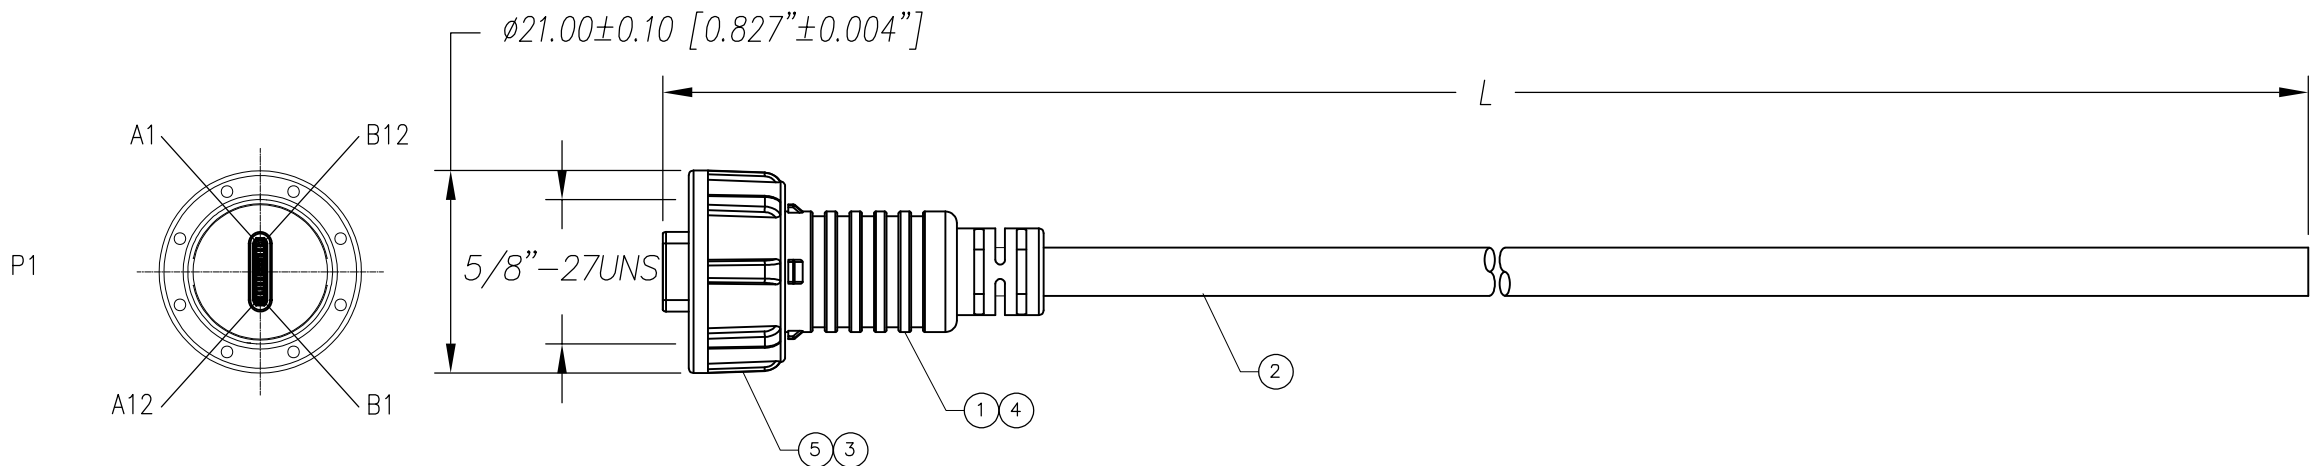

PART NUMBERS

P/N	DIM "L"
67U3CD-010M-K	1000 ± 20 [39.370"± .787"]
67U3CD-030M-K	3000 ± 20 [118.110"± .787"]

P/N KEY:

67U3CD-xxxy-K


K = BLACK

LENGTH: FEET = xxx, 1FT=001F 3FT=003F, 10F=010F

METER = xxx, 1M=010M 1.5M=015M, 10M=100M


CABLE ASSEMBLY FAMILY

PIN OUT:

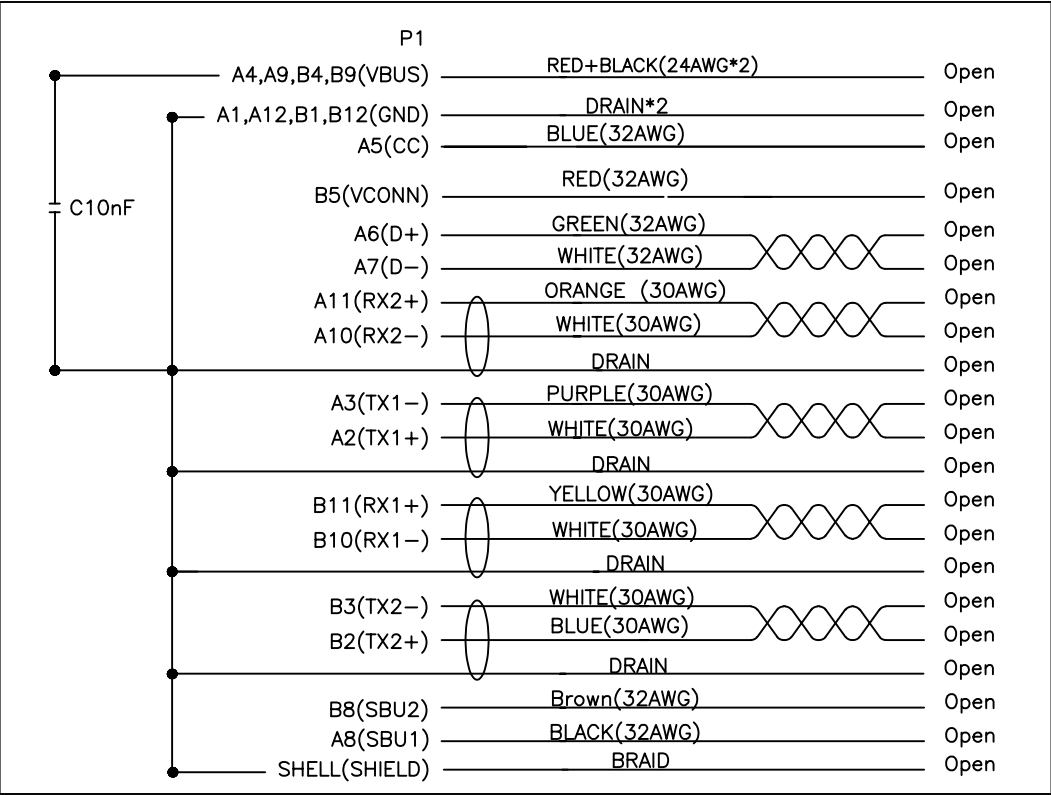

ITEM	DESCRIPTION	Q'TY
1	USB 3.1 TYPE C/M CONTACT SELECTIVE GOLD PLATED 30u" INSULATOR C1=10nF±20% INSULATOR BLACK, SHELL NICKEL PLATED	1
2	UL2725 (30AWGX1P+EAM)*4+(32AWGX1P+AM)+32AWGX4C+ 24AWG(7/0.20)X2C +E+AEB(16/11/0.08) 85% OD:5.0 COLOR: BLACK	A/R
3	SILICONE WATERPROOF GASKET (+3M9448 GLUE) COLOR:BLACK	1
4	OUTER MOLDING PVC COLOR: BLACK	A/R
5	WATERPROOF CAP COLOR: BLACK	1


THIRD ANGLE PROJECTION



DO NOT SCALE DRAWING
DRAWING IS SUBJECT TO
CHANGE WITHOUT NOTICE

DIMENSIONS: MM [INCHES]
UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE ±0.5 [.020"]
ANGLES ARE ± 1°

SHEET NO. 1 OF 1



stewart
CONNECTOR
a bel group

11118 Susquehanna Trail South
Glen Rock, PA 17327-9199
(717) 235-7512

<http://www.stewartconnector.com>

TITLE: CABLE ASSEMBLY, USB 3.1 TYPE-C/M (5/8-27 UNS COUPLING) TO BLUNT

THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF STEWART CONNECTOR AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN CONSENT OF STEWART CONNECTOR.

DRN BY: JE	DATE 06/24/25
APPD BY: KW	DATE 08/14/25
DWG NO. CT999332	REV. A0

