
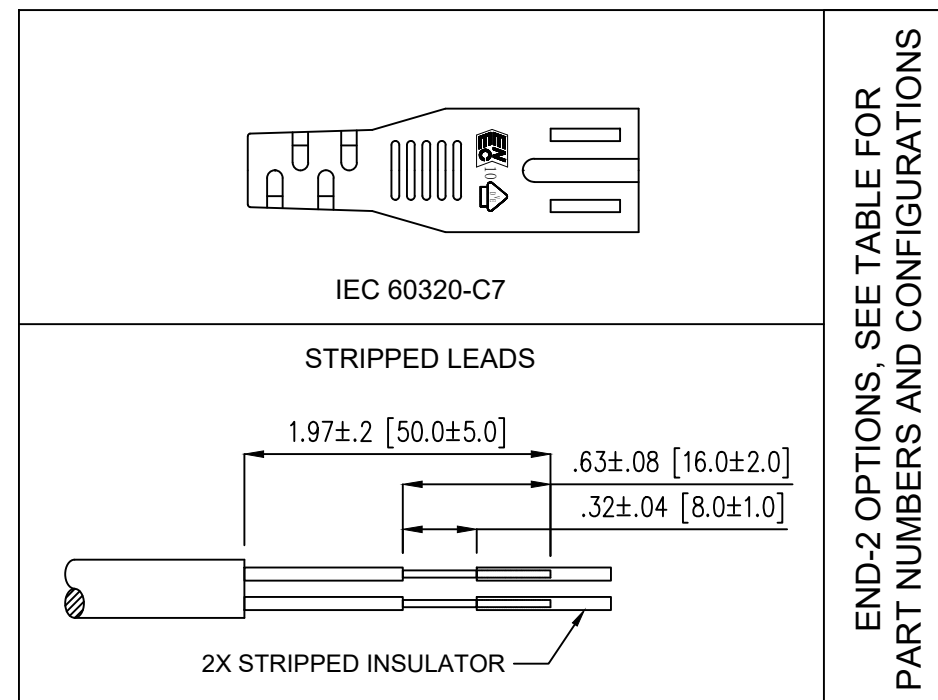
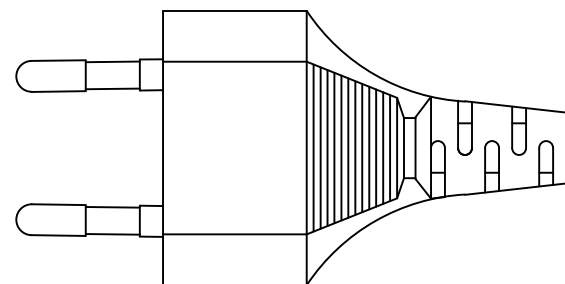


DATE	REV	ECN	APP'D BY
8/28/2025	A0	12590	GL

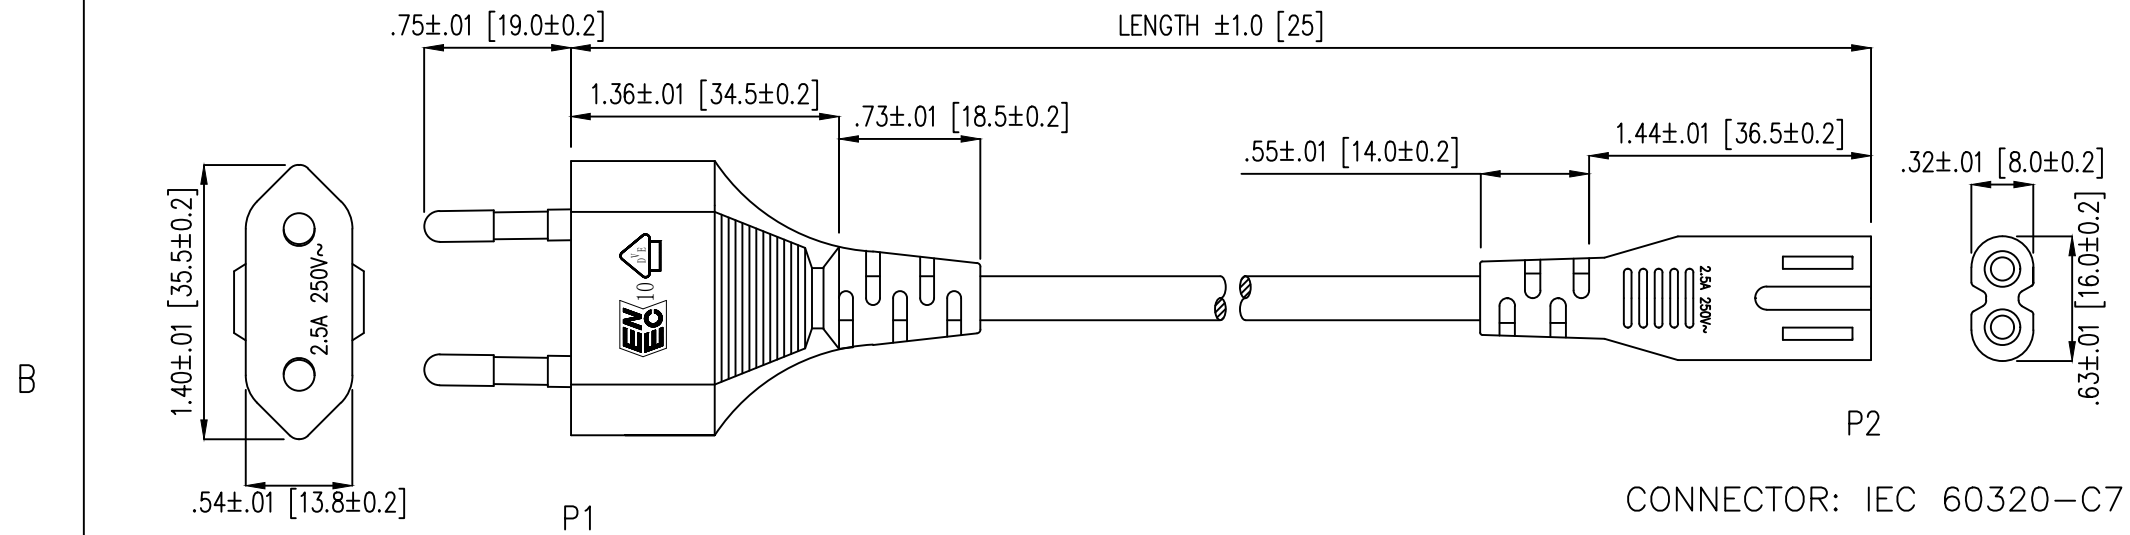

END-2 OPTIONS, SEE TABLE FOR
PART NUMBERS AND CONFIGURATIONS


NOTES:

1. MATERIAL
PLUG/CONNECTOR: MOLDED PVC, 45P, BLACK
CONTACTS: 2X ϕ .16 [4.0], ZN OVER CU
CONTACT INSULATION: PBT, BLACK
CABLE: ϕ .14 [3.5] X .22 [5.7])
WIRE: 2X .75mm² STRANDED COPPER
CABLE JACKET: PVC, BLACK
2. ELECTRICAL
VOLTAGE RATING: 250V
CURRENT RATING: 2.5A MAX
100% CONTINUITY/SHORT AND POLARITY
INSULATION RESISTANCE: >5M Ω
HIPOT AC/DC: 2kV/4kV, 1-SEC.
3. MECHANICAL
DURABILITY: $\geq$ 1000 CYCLES
4. ENVIRONMENTAL
TEMPERATURE RANGE: 14°F (-10°C) TO 176°F (80°C)
RELATIVE HUMIDITY: 10-85%

B

A

PACKAGING

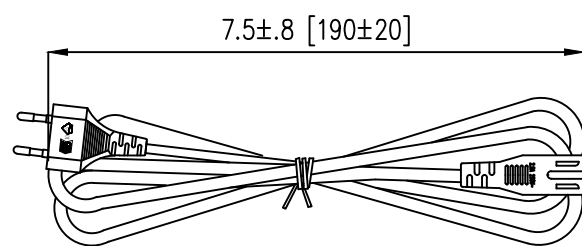

CABLE MARKINGS:







 KEMA-KEUR
 
 IEMMEQU
 

 N20050
 H03WH2-F 2*0.75mm²MSL

WIRE DIAGRAM

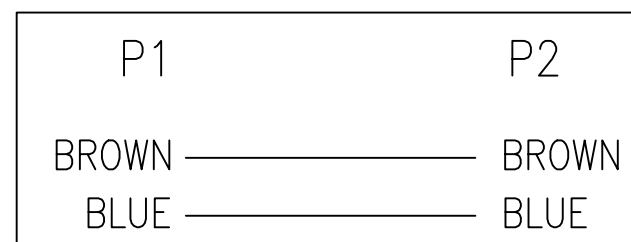


P1,P2:



RoHS

THIRD ANGLE PROJECTION



DO NOT SCALE DRAWING


PART NUMBER	SEE TABLE
-------------	-----------

DRAWING NUMBER
CT999330

THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF STEWART CONNECTOR AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN CONSENT OF STEWART CONNECTOR. THE SUBJECT MATTER MAY BE PATENTED OR A PATENT MAY BE PENDING.

AutoCAD

1

PART NUMBERS AND CONFIGURATIONS			
PART NUMBER	LENGTH	END-1	END-2
PC-E16006FC7	6-FT.	CEE 7/16	IEC 60320-C7
PC-E16006FSL			STRIPPED LEADS
 stewart CONNECTOR a bel group		11118 Susquehanna Trail South Glen Rock, PA 17327-9199 (717) 235-7512 http://www.stewartconnector.com	
TITLE EUROPEAN POWER CORD CEE 7/16 TO IEC 60320 C7 OR STRIPPED LEADS			
DIMENSIONS SHOWN ARE SUBJECT TO CHANGE WITHOUT NOTICE		DRWN BY: BR	DATE 6/26/25
DIMENSIONS: INCHES [METRIC]		CHKD BY: BR	DATE 6/26/25
TOLERANCES UNLESS OTHERWISE NOTED 2 PLC. DEC. ±0.02 [0.5] 3 PLC. DEC. ±0.012 [0.30] 4 PLC. DEC. ±0.0079 [0.200] ANGLES ± 5°		APPD BY: KW	DATE 6/26/25
		SHEET 1 OF 1	REV. A0