


NOTES:

1. MATERIAL
PLUG/CONNECTOR: MOLDED PVC, 45P, BLACK
CONTACTS: 2X ϕ .19 [4.8], ZN OVER CU
CABLE: ϕ .27 [6.8]
WIRE: 3X .75mm² STRANDED COPPER
CABLE JACKET: PVC, BLACK
2. ELECTRICAL
VOLTAGE RATING: 250V
CURRENT RATING: 10A MAX
100% CONTINUITY/SHORT AND POLARITY
INSULATION RESISTANCE: >5M Ω
HIPOT AC/DC: 2kV/4kV, 1-SEC.
3. MECHANICAL
DURABILITY: $\geq$ 1000 CYCLES
4. ENVIRONMENTAL
TEMPERATURE RANGE: 14°F (-10°C) TO 176°F (80°C)
RELATIVE HUMIDITY: 10-85%




CONNECTOR: IEC 60320-C13

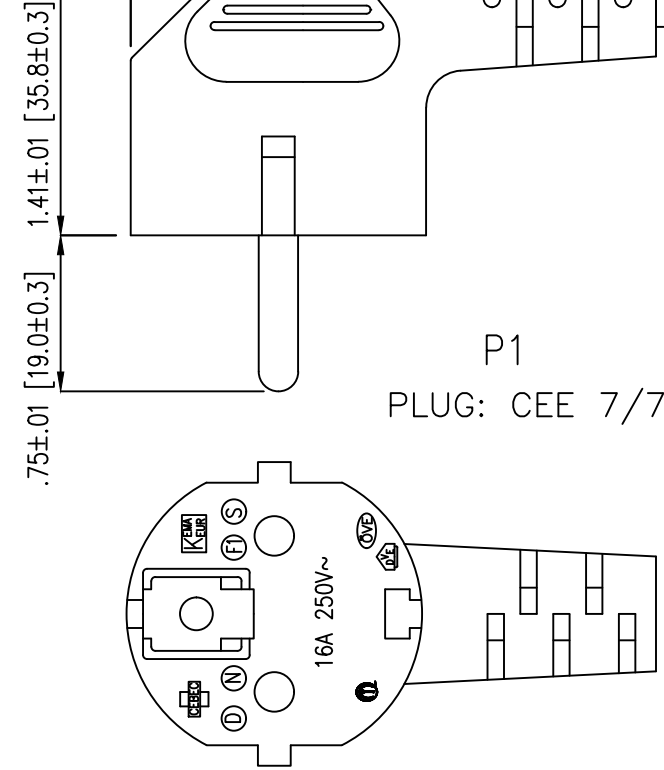


P1

PLUG: CEE 7/7

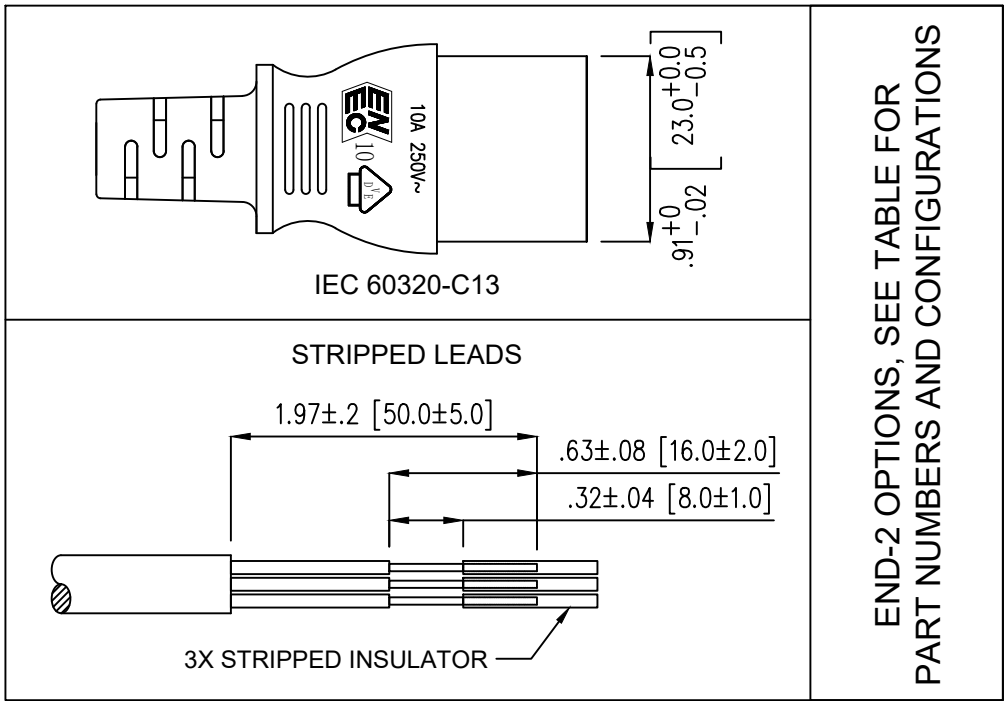


END-2 OPTIONS, SEE TABLE FOR
PART NUMBERS AND CONFIGURATIONS

PACKAGING

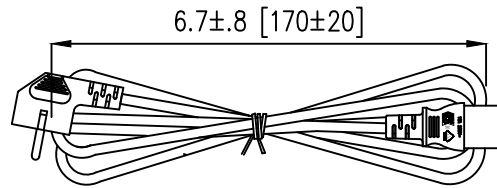

WIRE DIAGRAM

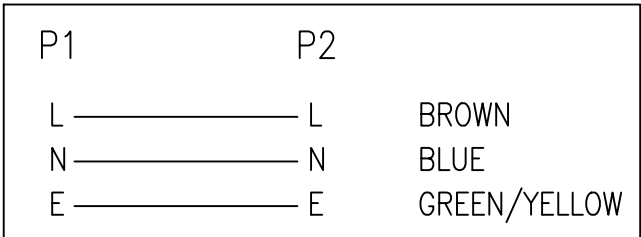

CABLE MARKINGS:

H05V-F 3G 0.75mm² (D) (S) (N) (FI) (ÖVE) KEMA-KEUR  IEMMEQU <VDE> (+s)
N20050 GTSA-3 3G 0.75mm² MSL


P1:        

P2:               

RoHS



THIRD ANGLE PROJECTION



DO NOT SCALE DRAWING

PART NUMBER
SEE TABLE

DRAWING NUMBER
CT999328

THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF STEWART CONNECTOR AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN CONSENT OF STEWART CONNECTOR. THE SUBJECT MATTER MAY BE PATENTED OR A PATENT MAY BE PENDING.

PART NUMBERS AND CONFIGURATIONS			
PART NUMBER	LENGTH	END-1	END-2
PC-E7006FC13	6-FT.	CEE 7/7	IEC 60320-C13
PC-E7006FSL			STRIPPED LEADS
PC-E7008FC13	8-FT.		IEC 60320-C13
PC-E7008FSL			STRIPPED LEADS



11118 Susquehanna Trail South
Glen Rock, PA 17327-9199
(717) 235-7512

<http://www.stewartconnector.com>

TITLE EUROPEAN POWER CORD CEE 7/ TO IEC 60320 C13 OR STRIPPED LEADS	
DIMENSIONS SHOWN ARE SUBJECT TO CHANGE WITHOUT NOTICE	DRWN BY: BR DATE: 6/26/25
DIMENSIONS: INCHES [METRIC]	CHKD BY: BR DATE: 6/26/25
TOLERANCES UNLESS OTHERWISE NOTED: 2 PLC. DEC. ±0.02 [0.5] 3 PLC. DEC. ±0.012 [0.30] 4 PLC. DEC. ±0.0079 [0.200] ANGLES ± 5°	APPD BY: KW DATE: 6/26/25 SHEET 1 OF 1 REV. A0