
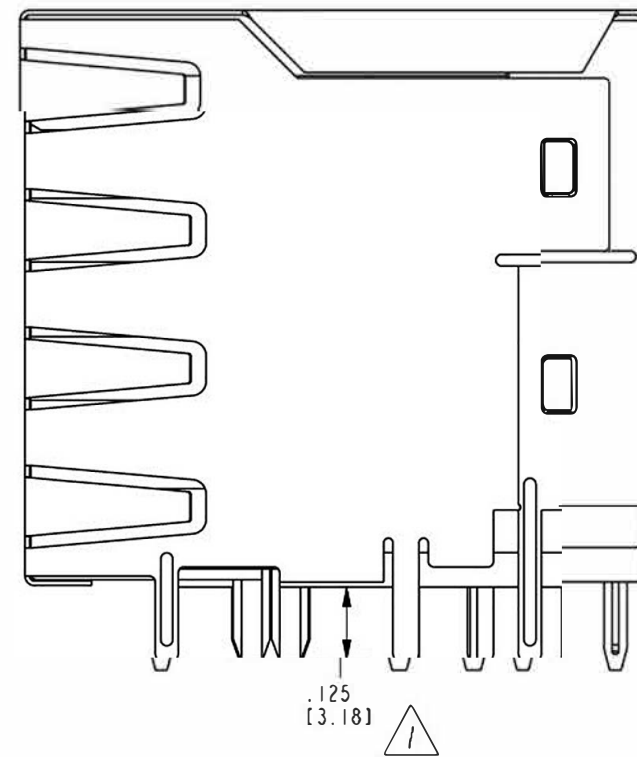


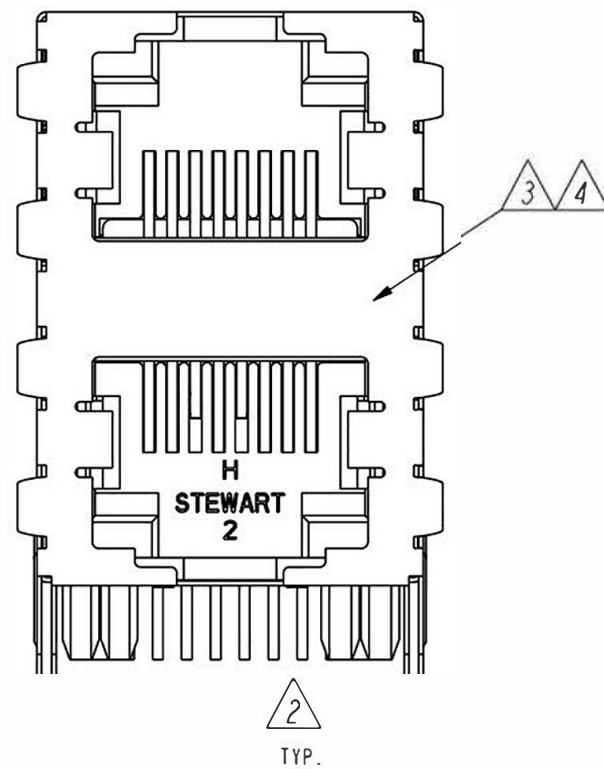



NOTES:

- 1 PCB POST HEIGHT AS NOTED.
- 2 TERMINAL PLATING:
150 MICRO INCHES OF MATTE TIN OVER
50-100 MICRO INCHES OF DUCTILE NICKEL
- 3 SHIELD MATERIAL: C26000 COPPER ALLOY, .008 [0.2] THICK
- 4 SHIELD PLATING:
30-100 MICRO INCHES PREPLATED NICKEL
OVER 40 MICRO INCHES MINIMUM COPPER
WITH SOLDER DIPPED TAILS

5. OPERATING TEMPERATURE RANGE: -40°C TO +85°C

RoHS



THIRD ANGLE PROJECTION 		 stewart CONNECTOR a bel group	11118 Susquehanna Trail South Glen Rock, PA 17327-9199 (717) 235-7512 http://www.stewartconnector.com	
DO NOT SCALE DRAWING DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE		TITLE: EIGHT CONTACT, EIGHT POSITION SHIELDED STACK JACK ENHANCED SHIELD, 2 PORT (1 ON 1)		
DIMENSIONS: INCHES [METRIC] UNLESS OTHERWISE SPECIFIED TOLERANCES ARE $\pm .005$ [0.13] ANGLES ARE $\pm 1^\circ$		THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF STEWART CONNECTOR AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN CONSENT OF STEWART CONNECTOR. ONE OR MORE U.S. PATENTS MAY APPLY TO THIS PRODUCT. FOR DETAILS, PLEASE VISIT: HTTP://BELFUSE.COM/STEWART/STEWART-PATENTS/		
SHEET NO. 2 OF 2		DRN BY: TRM APPD BY: DHG DWG. NO. CT730189F	DATE 1-8-18 DATE 1-8-18	REV. B0