

12

11

10

9

8

7

6

5






4

3

2

1

DATE	REV	REVISION CHANGES	EDN	APP'D BY
09/19/18	AD	AS DRAWN	-	ADD
06/01/19	AI	REVISED PART NUMBER	12402	ADD

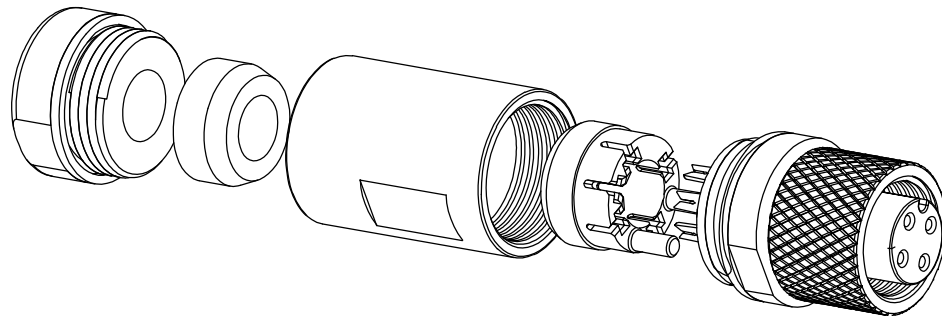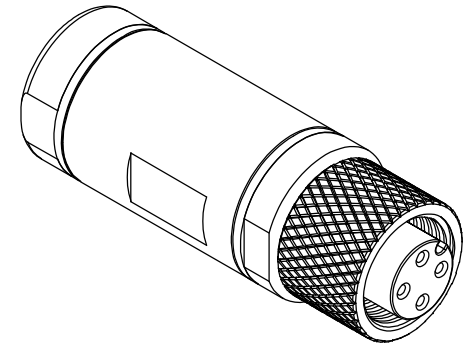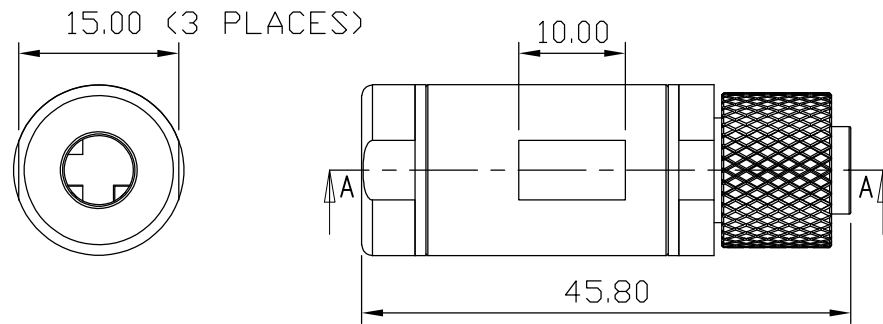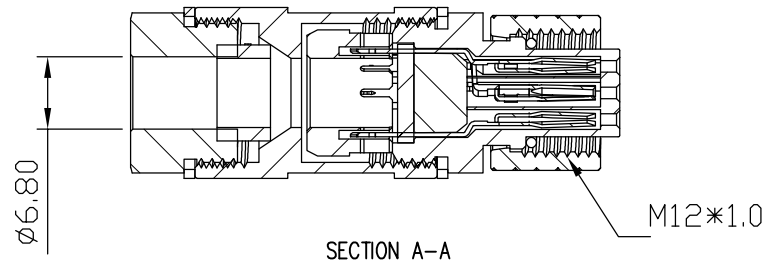

A-CODE (4 PIN)

NOTES:

- CONNECTOR MATERIALS:
HOUSING: THERMOPLASTIC UL94 V-0
CONTACTS/SHIELD: COPPER ALLOY
O-RING MATERIAL: SILICONE UL94 V-0
EPOXY POTTING COMPOUND IN REAR CAVITY
SHIELD PLATING: NICKEL
CONTACT PLATING: SELECTIVE GOLD (1 µIN) OR EQUIVALENT IN THE CONTACT AREA
- FOR PRODUCT SPECIFICATIONS SEE PRO39-01
- DIMENSIONS AND TOLERANCES COMPLY WITH IEC 61076-2-101 STANDARD.
- PLUG ACCOMMODATES CABLE Ø6.00 - 6.50
- CODING: A-STANDARD
- NICKEL PLATED IDC ACCOMMODATES 22 AWG WIRE
- CURRENT RATING: 4 AMPS MAX
- INSULATION RESISTANCE: 100 MOHMS MIN @ 500 VDC
- DEGREE OF PROTECTION: IP67
- TEMPERATURE RANGE: -20°C TO +85°C
- MATING CYCLES: 100 INSERTIONS

4	SS-12000-023
NUMBER OF CONTACTS	PART NUMBER

THIRD ANGLE PROJECTION DO NOT SCALE DRAWING DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE UNLESS OTHERWISE SPECIFIED TOLERANCES ARE DATS (ANSI) ANGLES ARE 3/4 HEET NO. 1 OF 1	11118 Squeakhorns Trail South Glen Rock, PA 17327-9199 (717) 235-7512 http://www.stewartconnector.com	Field Terminated Plug with IDCs, M12 A-Code, Female	DATE 09/06/18 REV A1



AutoCAD At Metric