



В

Α

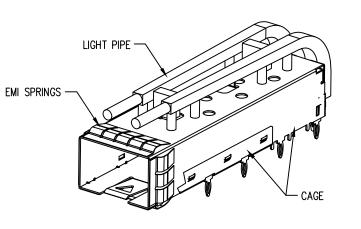

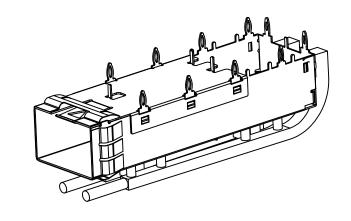



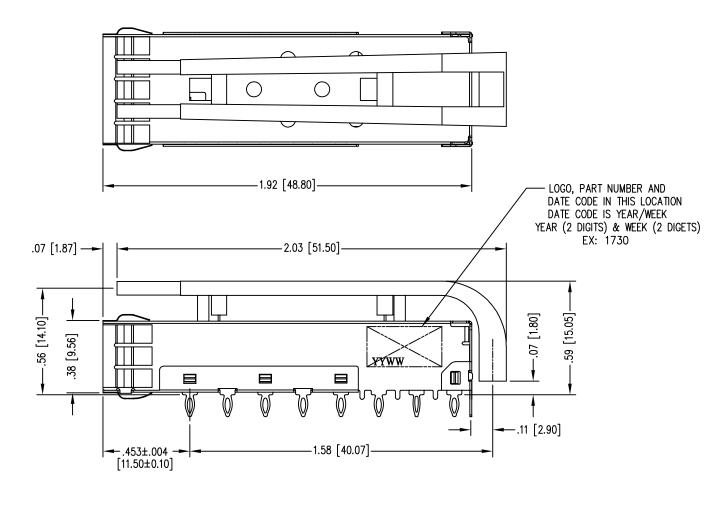


В

1. MATERIALS: CAGE: COPPER ALLOY EMI SPRINGS: COPPER ALLOY LIGHT PIPE: PC UL 94V-0, COLOR: CLEAR

2. PLATING: CAGE: NICKEL EMI SPRINGS: NICKEL 3. TEMPERATURE:

OPERATIONAL: −40°C~+85°C STORAGE: −55°C~+105°C

- 4. FOR PRODUCT SPECIFICATIONS SEE PR043-01.
- 5. MATES WITH SFP MSA COMPLIANT TRANSCEIVERS.



TOLERANCES ARE: ANGLES ± 2° 1 PLC. DEC. ±.010" [±0.25] 2 PLC. DEC. ±.008" [±0.20] 3 PLC. DEC. ±.006" [±0.15] DO NOT SCALE DRAWING 1 OF 2

CONNECTOR a bel group

Glen Rock, PA 17327-9199 (717) 235-7512

http://www.stewartconnector.com

11118 Susquehanna Trail South

SS-79100-003

PART NUMBER


SFP+ 1X1 CAGE W/LIGHT PIPE, PRESS FIT THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON

ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF STEWART CONNECTOR AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEI CONSENT OF STEWART CONNECTOR. ONE OR MORE U.S. PATEN MAY APPLY TO THIS PRODUCT. FOR DETAILS, PLEASE VISIT: HTTP://BELFUSE.COM/STEWART/STEWART_PATENTS

N -	DRN BY:	TRM	DATE 6-	5–17
N NTS	APPD BY:	DHG	DATE 6-	30-17
/	DWG NO.	CT790003		REV. A4

RoHS

AutoCAD

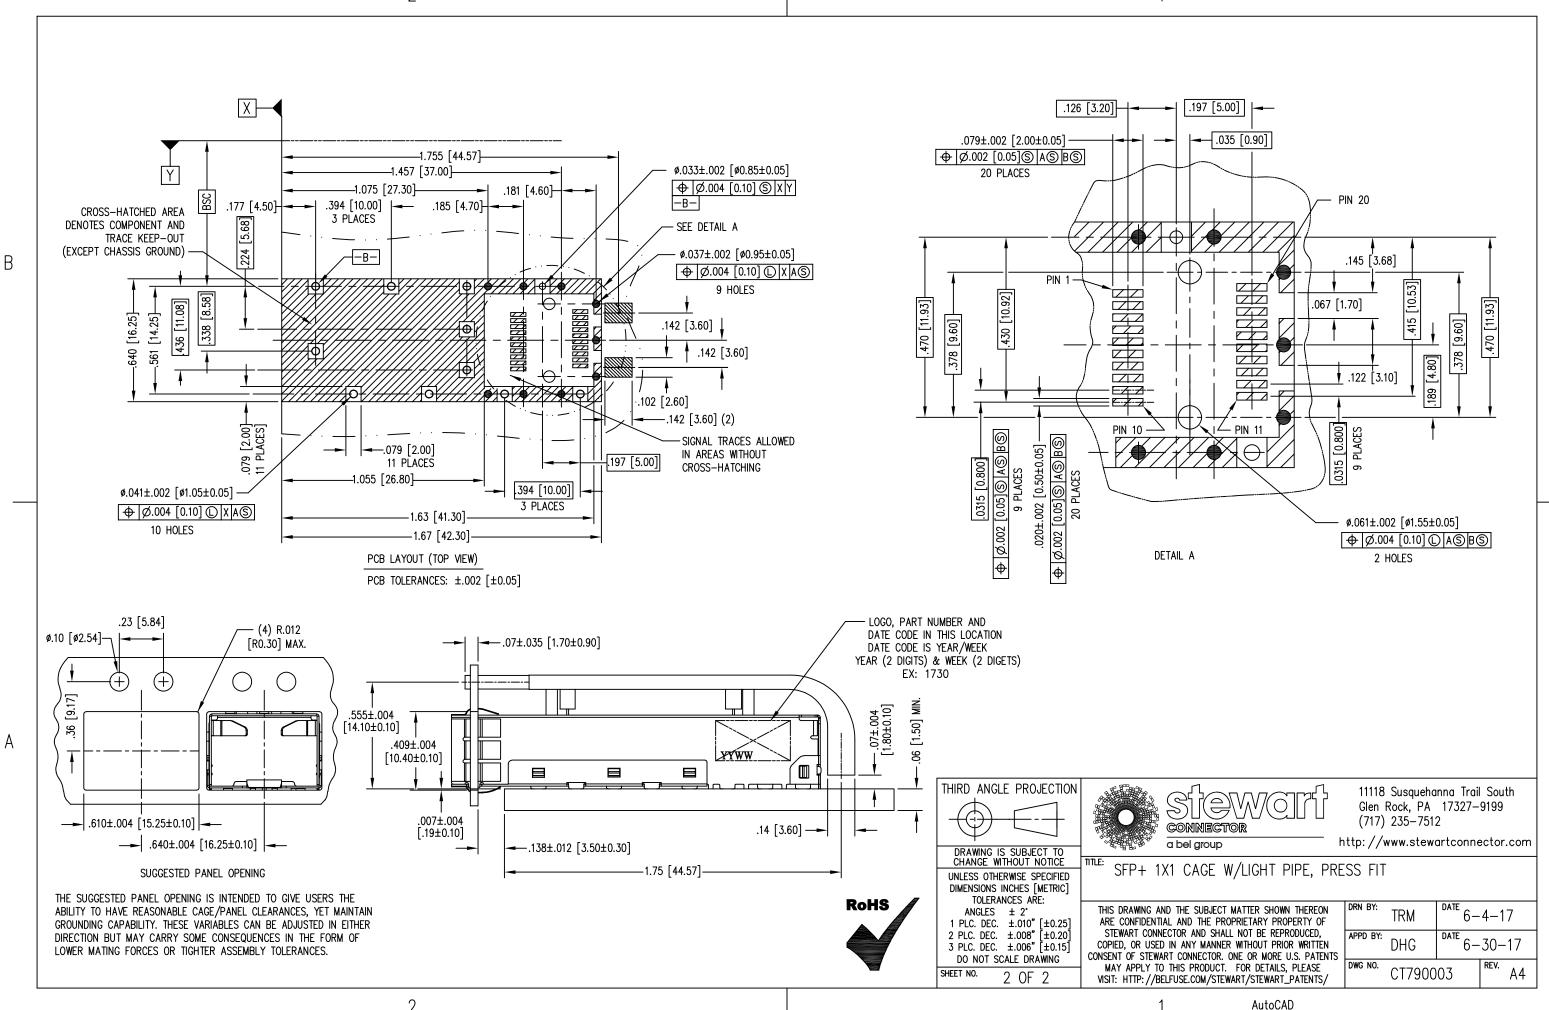

В

Α