
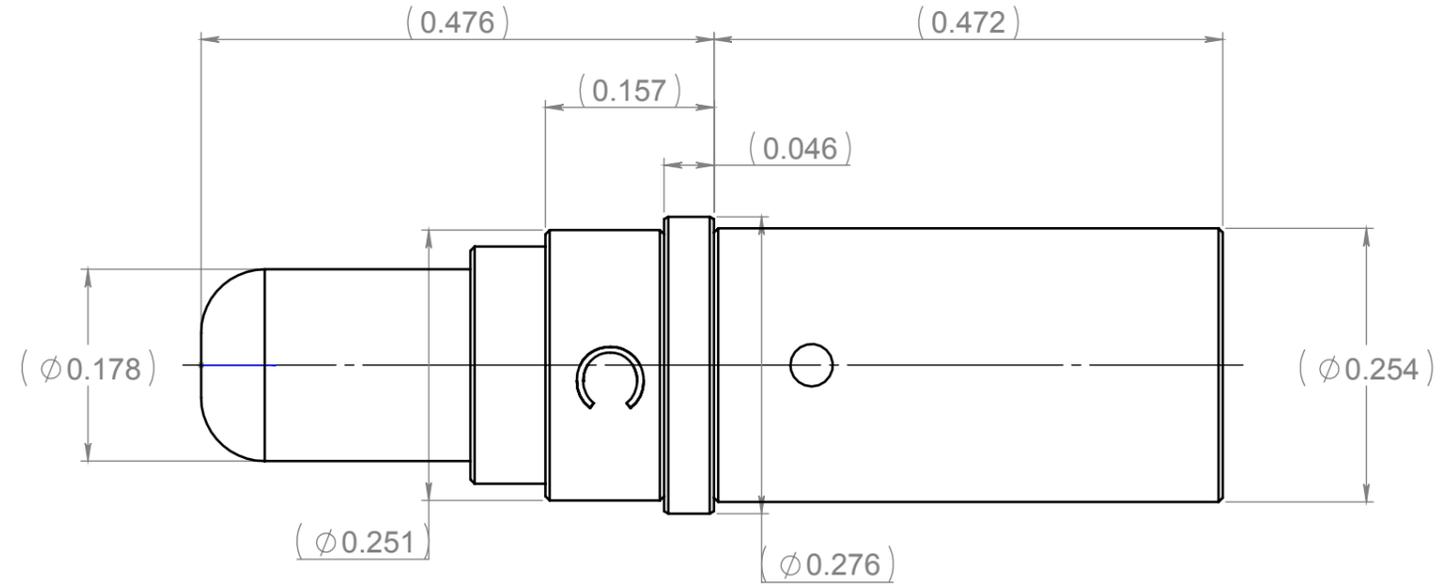


SERIES C-ENX	DESIGNATION	POWER PIN CONTACT SIZE 5, CRIMP STYLE	C-617280-S	A
	PROTECTION			

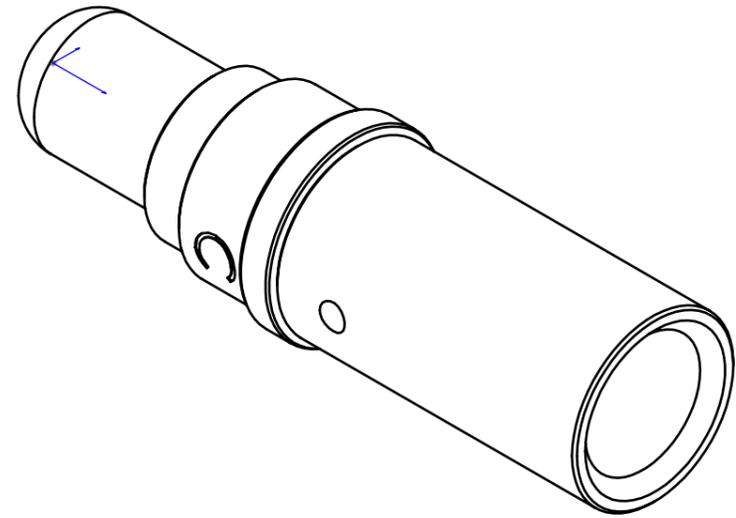

NOTES:

1. CINCH PART NUMBER: C-617280
- 2 ALL DIMENSIONS ARE FOR REFERENCE
3. CONTACTS ARE BULK PACKAGED IN SEALED PLASTIC BAG IDENTIFIED WITH:

CINCH
DATE CODE
P/N: C-617280
Licensed Radiall P/N 617280

MATERIALS AND FINISHES: COPPER ALLOY WITH GOLD PLATING OVER NICKEL

WIRES ACCOMODATED: AWG 8, AWG 10
INSULATOR DIAMETER: .146 MAX
STRIP LENGTH: .388

CRIMP TOOL RECOMMENDATED: M22520/23-01
POSITIONER: M22520/23-02

EXTRACTION TOOL: M81969/28-01

CINCH RECOMMEND TO USE MS3348-8-10 BUSHING WHEN CRIMP TO AWG 10 WIRE, TO MEET SAE AS-39029 TENSILE STRENGTH REQUIREMENTS

VOL : 479.26 mm³ WEIGHT : 4.22 grams SURF.: 665.19 mm²

						ALL DIMENSIONS ARE PLATING INCLUDED	Ra . ✓	SCALE 6:1		A3	CINCH CONNECTIVITY SOLUTIONS
						Gen.Tol. ± inches °					
IND	ECN	MODIFICATION			DATE	NAME	CHECKED	MATERIAL	DRAWN NAME		
A	CREATION	PEN:	EP: .	N°Provisional:	DATE	NAME		TREATMENT	CHECKED NAME		