
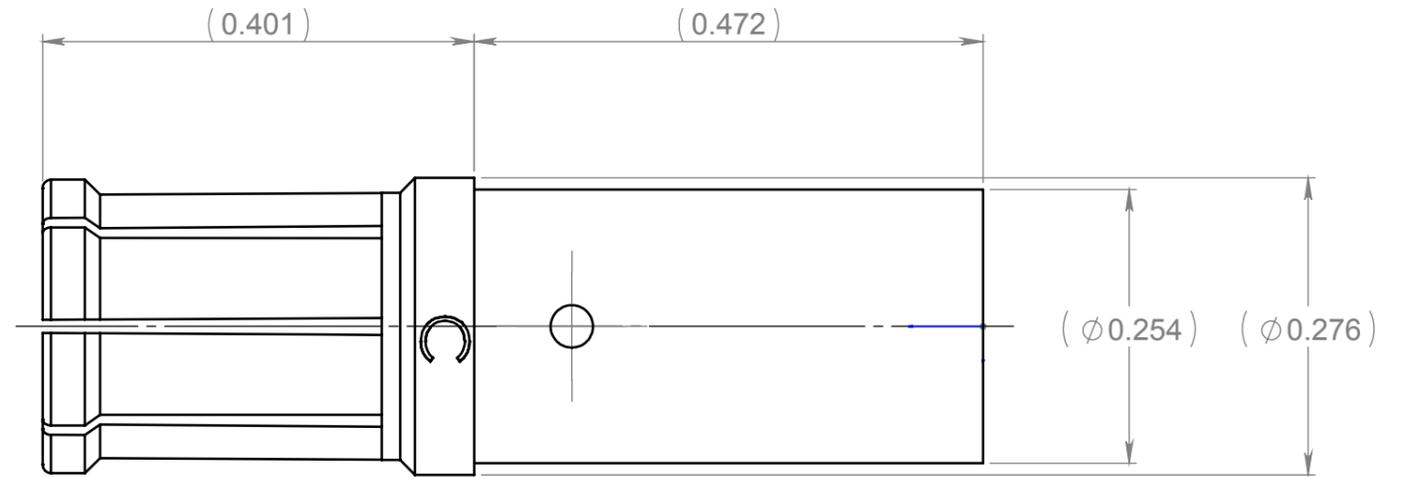


| | | | | |
|------------------------|-------------|---|-------------------|----------|
| SERIES C-ENX | DESIGNATION | POWER SOCKET CONTACT SIZE 5, CRIMP STYLE | C-617390-S | A |
| | PROTECTION | | | |

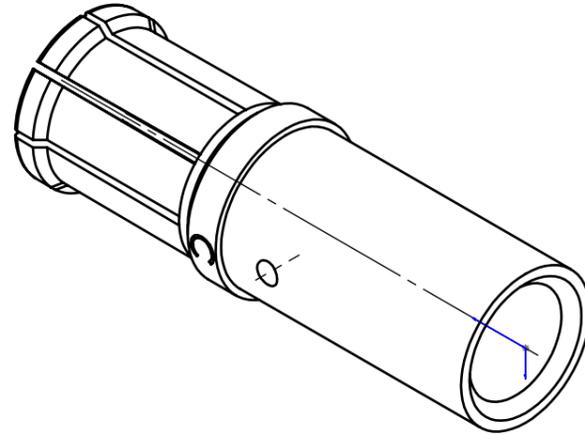

NOTES:

1. CINCH PART NUMBER: C-617390
- 2 ALL DIMENSIONS ARE FOR REFERENCE
3. CONTACTS ARE BULK PACKAGED IN SEALED PLASTIC BAG IDENTIFIED WITH:

CINCH
DATE CODE
P/N: C-617390
Licensed Radiall P/N 617390

MATERIALS AND FINISHES: COPPER ALLOY WITH GOLD
PLATING OVER NICKEL

WIRES ACCOMODATED: AWG 8, AWG 10
INSULATOR DIAMETER: .146 MAX
STRIP LENGTH: .388

CRIMP TOOL RECOMMENDATED: M22520/23-01
POSITIONER: M22520/23-02

EXTRACTION TOOL: M81969/28-01

CINCH RECOMMEND TO USE MS3348-8-10 BUSHING
WHEN CRIMP TO AWG 10 WIRE, TO MEET SAE AS-
39029 TENSILE STRENGTH REQUIREMENTS

| | | | | | | | | | | | |
|------------|-----------------|---------------------|--------------|-----------------------|-------------|--|----------------|---------------------|--|---|--|
| | | | | | | VOL : | | WEIGHT : 4.27 grams | | SURF.: | |
| | | | | | | ALL DIMENSIONS ARE PLATING INCLUDED | | Ra . ✓ | | SCALE 6:1 | |
| | | | | | | Gen.Tol. ± inches ° | | | | A3 | |
| | | | | | | MATERIAL | | DRAWN NAME | | CINCH CONNECTIVITY SOLUTIONS This document is the property of CINCH. It cannot be reproduced or communicated to a third party without a prior written permission. | |
| | | | | | | TREATMENT | | CHECKED NAME | | | |
| IND | <i>ECN</i> | <i>MODIFICATION</i> | | | <i>DATE</i> | <i>NAME</i> | <i>CHECKED</i> | | | | |
| A | <i>CREATION</i> | <i>PEN:</i> | <i>EP: .</i> | <i>N°Provisional:</i> | <i>DATE</i> | <i>NAME</i> | | | | | |